

## HS-1702 SERIES



Materials







Sprockets



Applications

**Plate Materials:** POM-DP, POM-LF

**Pin Material:** Cold rolled austenitic stainless steel

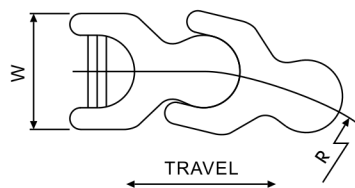

| Dimension    | mm    | inches |
|--------------|-------|--------|
| P            | 50.0  | 1.969  |
| R            | 150.0 | 5.906  |
| W            | 53.2  | 2.094  |
| H            | 25.0  | 0.984  |
| T            | 4.8   | 0.189  |
| S            | 2.0   | 0.079  |
| E            | 8.0   | 0.315  |
| RD           | 50.0  | 1.969  |
| GC(Straight) | 59.5  | 2.343  |
| GC(Curve)    | 56.8  | 2.236  |

### HS-1702 (Side Flexing Keel Chains)

#### CHARACTERISTICS

|         | Width W |        | Working Load |           | Radius |        | Reverse Radius |        | Weight |
|---------|---------|--------|--------------|-----------|--------|--------|----------------|--------|--------|
|         | (mm)    | (inch) | N(21°C)      | lbs(21°C) | (mm)   | (inch) | (mm)           | (inch) | (kg/m) |
| HS-1702 | 53.2    | 2.09   | 2669         | 600       | 150    | 5.90   | 50             | 1.97   | 1.55   |