

## HS-820-T SERIES



Materials





Sprockets





Applications

**Plate Materials:** POM-DP,POM-LF

**Pin Material:** Cold rolled austenitic stainless steel

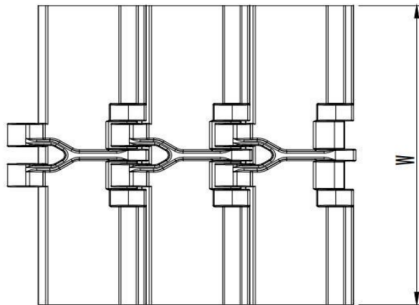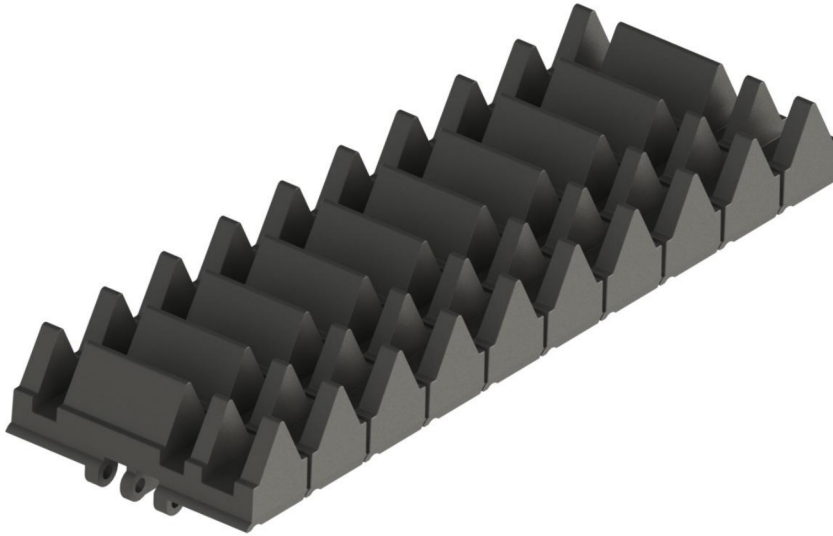

| Dimension | mm    | inches |
|-----------|-------|--------|
| P         | 38.1  | 1.5    |
| M         | 41.5  | 1.634  |
| L         | 45.4  | 1.787  |
| H         | 23.6  | 0.929  |
| E         | 7     | 0.276  |
| W         | 120.9 | 4.76   |

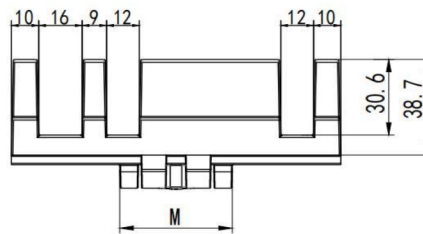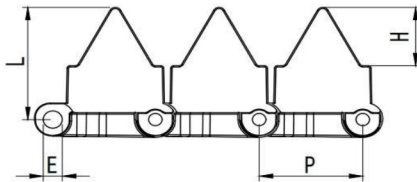

### HS-820-T (Straight Running Plastic Chain)

#### CHARACTERISTICS

|                  | Width W |        | Working Load |           | Radius |        | Reverse Radius |        | Weight |
|------------------|---------|--------|--------------|-----------|--------|--------|----------------|--------|--------|
|                  | (mm)    | (inch) | N(21°C)      | lbs(21°C) | (mm)   | (inch) | (mm)           | (inch) | (kg/m) |
| HS-820-K476-25mm | 120.9   | 4.76   | 1230         | 276       | -      | -      | 50             | 1.97   | 1.00   |