


NOVO 60 GREEN
NOVO
INFELT
GENERAL CHARACTERISTICS

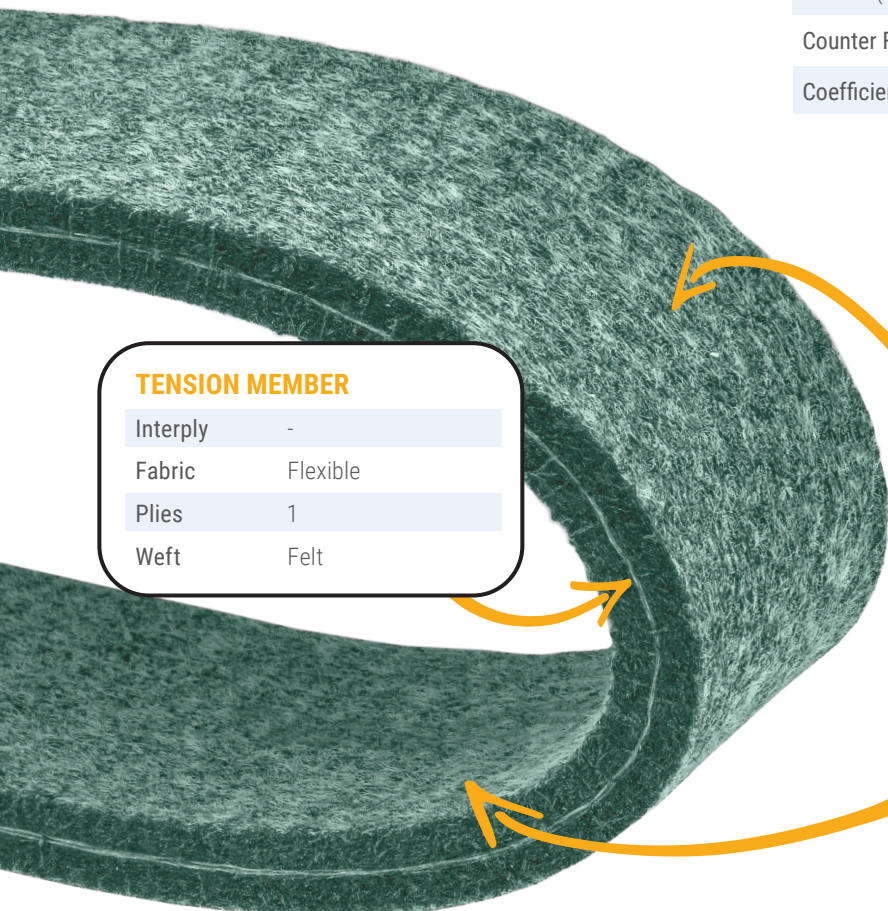
Needled polyester green, rubber impregnated.
5.5mm thick.

BEST USED FOR

Cutting and high temperature applications,
stackers and general conveying.

TECHNICAL INFORMATION

	IMPERIAL	METRIC
Max Production Width	78.74in	2000mm
Total Thickness	0.22in	5.5mm
Mass	0.72lb/ft ²	3.5kg/m ²
Tensile force at 1% elongation (static)	97lbf/in Internal Method - ref. ISO 21181	17N/mm
Working Temp.	+14/+248 F°	-10/+120 C°
Flexion (A)	4.72in 120mm	
Counter Flexion (B)	4.72in 120mm	
Coefficient of friction (bottom side) - Steel		0.25


TENSION MEMBER

Interply	-
Fabric	Flexible
Plies	1
Weft	Felt

TOP SIDE (CARRYING)

Material	Felt
Color	Green
Thickness	-- in -- mm
Hardness	-- ISO 868
Surface	Bare

BOTTOM SIDE (PULLEY)

Material	Felt
Color	Green
Thickness	-- in -- mm
Hardness	-- ISO 868
Surface	Bare

SPECIAL CHARACTERISTICS
