

HS-2815 SERIES



Materials




Sprockets
90~92



Applications

Plate Materials: S, SS-4, P, SS

Pin Material: Case hardened seetl(for carbon steel chains)
Cold rolled austenitic stainless steel(for stainless steel chains)

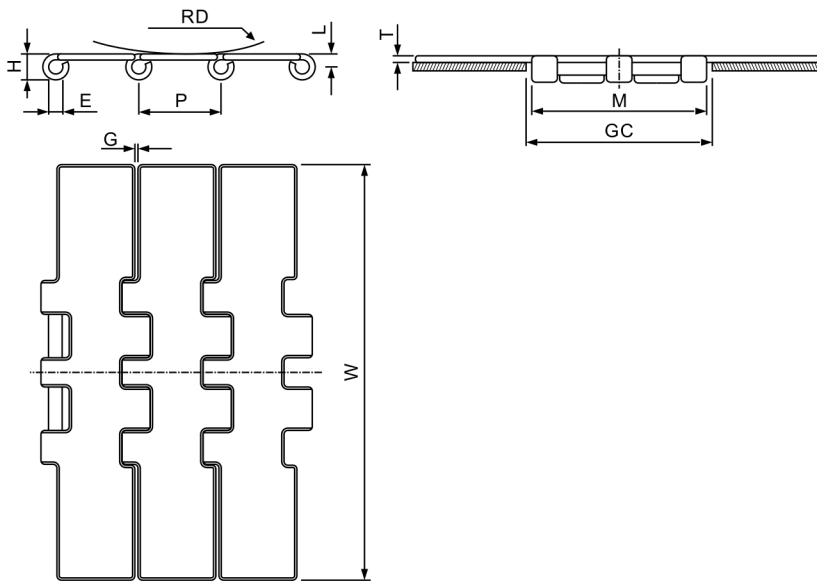

Dimension	mm	inches
P	38.1	1.500
T	3.0	0.118
M	80.0	3.150
L	6.4	0.252
H	13.0	0.512
E	6.4	0.250
G	1.8	0.071
RD	150.0	5.906
GC	82.5	3.248

HS-2815 (Straight Running-Single Hinge)

CHARACTERISTICS

	Width W		Working Load		Sideflexing Radius		Weight
	(mm)	(inch)	N(21 °C)	lbs(21 °C)	(mm)	(inch)	(kg/m)
HS-S 2815 K7 1/2	190.5	7.50	18000	4050	-	-	5.90
HS-SS 2815 K7 1/2	190.5	7.50	10300	2318	-	-	5.40
HS-P 2815 K7 1/2	190.5	7.50	15000	3375	-	-	5.62
HS-SS 2815 K7 1/2	190.5	7.50	10600	2385	-	-	5.40