

HS-881TAB SERIES



Materials



Sprockets




Applications

Plate Materials: S, SS

Pin Material: Case hardened seetl(for carbon steel chains)

Cold rolled austenitic stainless steel(for stainless steel chains)

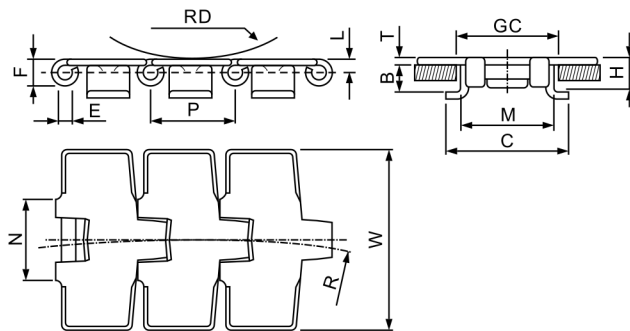

Dimension	mm	inches
P	38.1	1.500
T	3.0	0.118
M	43.0	1.693
N	38.3	1.508
C	56.0	2.205
L	6.4	0.252
H	19.3	0.760
E	6.4	0.250
B	12.8	0.504
F	13.0	0.512
RD	75.0	2.953
GC(Straight)	46.0	1.811
GC(Curve)	44.5	1.752

HS-881TAB (Sideflexing-Tab)

CHARACTERISTICS

	Width W		Working Load		Sideflexing Radius		Weight
	(mm)	(inch)	N(21°C)	lbs(21°C)	(mm)	(inch)	(kg/m)
HS-S 881TAB K3 1/4	82.6	3.25	11600	2610	457.2	18	2.96
HS-S 881TAB K4 1/2	114.3	4.50	11600	2610	609.6	24	3.60
HS-S 881TAB K7 1/2	190.5	7.50	11600	2610	609.6	24	5.00
HS-SS 881TAB K3 1/4	82.6	3.25	5600	1260	457.2	18	2.99
HS-SS 881TAB K4 1/2	114.3	4.50	5600	1260	609.6	24	3.63
HS-SS 881TAB K7 1/2	190.5	7.50	5600	1260	609.6	24	5.05