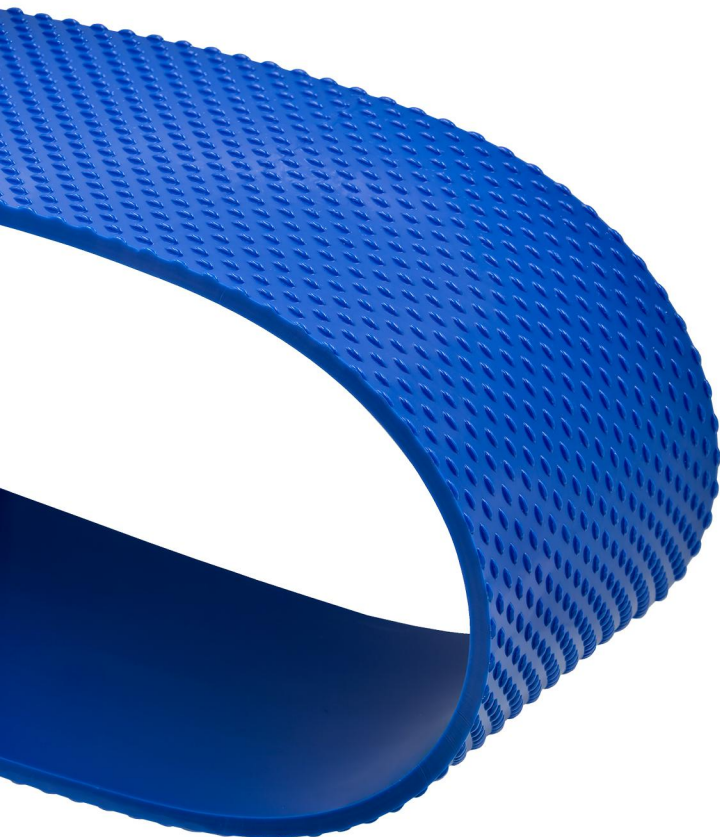
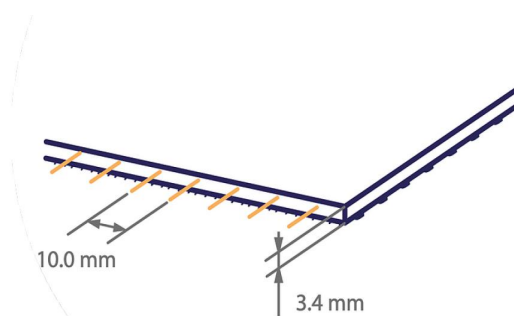


REO-F30 Rice DB
FRICTION DRIVE

GENERAL CHARACTERISTICS

Homogenous Polyether based PU belt with rice pattern top. Aramid reinforced. USDA Approved. Blue. Anti-microbial

TECHNICAL INFORMATION

	IMPERIAL	METRIC
Max Production Width	55.91 in	1420 mm
Mass	0.778 lb/ft ²	3.8 kg/m ²
Tensile force at 1% elongation (static)	91.2 lbf/in	16 N/mm
Min. Working Temp.	-22 F°	-30 C°
Max. Working Temp.	230 F°	110 C°
Flexion (A) 	3.54 in	90 mm
Coefficient of friction Dry (bottom side) - Steel		0.3
Coefficient of friction Wet (bottom side) - Steel		0.5
Hardness (Shore A)	95	


PROFILE INFORMATION

Total Thickness	0.134 in	3.4 mm
Pitch	0 in	0 mm
Tension Member	Aramid	
Spacing Between Cords	0.39 in	10 mm

⚠ WARNING: This product can expose you to chemicals including titanium dioxide, which is known to the State of California to cause cancer or birth defects or other reproductive harm. For more information visit www.P65WARNINGS.ca.gov

SPECIAL CHARACTERISTICS

✓ **Food Approved, FDA compliance**
acc.to 21 CFR parts 170-19

✓ **Food Approved, EU compliance**
(EC) No. 1935/2004 & (EU) No. 10/2011

✓ **Hydrolysis Resistant**

✓ **Antimicrobial Protection**

✓ **USDA Certified**

✓ **Oil & Fat Resistant**

