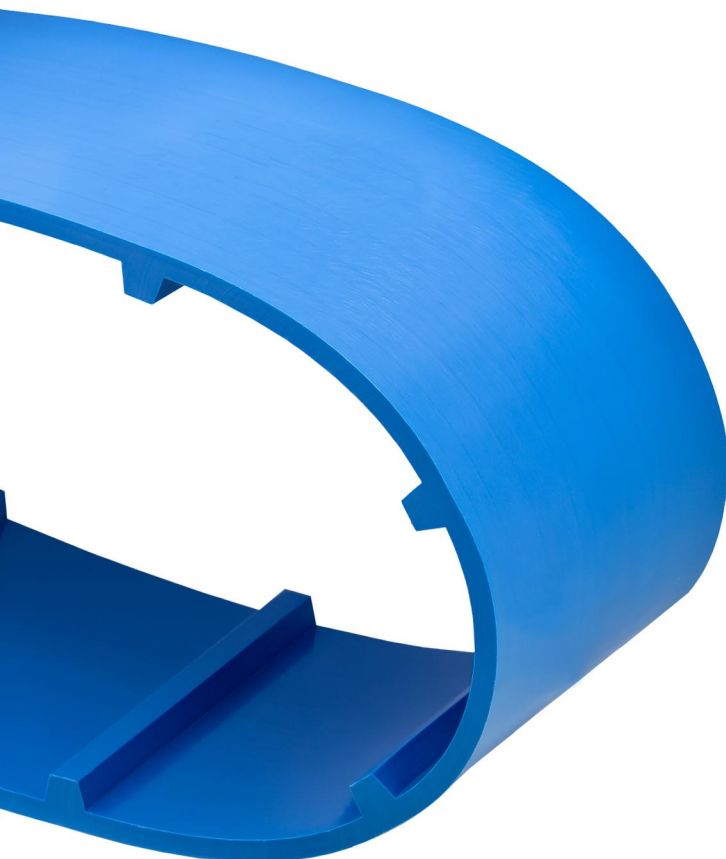
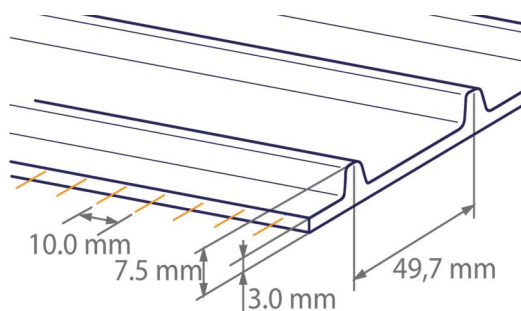


REO-T50 SB
POSITIVE DRIVE

GENERAL CHARACTERISTICS

Positive driven homogenous TPU belt. Aramid reinforced. 50mm pitch. USDA Approved. Blue

TECHNICAL INFORMATION

	IMPERIAL	METRIC
Max Production Width	55.91 in	1420 mm
Mass	0.881 lb/ft ²	4.3 kg/m ²
Tensile force at 1% elongation (static)	91.2 lbf/in	16 N/mm
Min. Working Temp.	-4 F°	-20 C°
Max. Working Temp.	194 F°	90 C°
Flexion (A) 	3.66 in	93 mm
Coefficient of friction Dry (bottom side) - Steel		0.4
Coefficient of friction Wet (bottom side) - Steel		0.5
Hardness (Shore A)	95	


PROFILE INFORMATION

Total Thickness	0.118 in	3 mm
Pitch	1.97 in	50 mm
Tension Member	Aramid	
Spacing Between Cords	0.39 in	10 mm

 **WARNING:** This product can expose you to chemicals including titanium dioxide, which is known to the State of California to cause cancer or birth defects or other reproductive harm. For more information visit www.P65WARNINGS.ca.gov

SPECIAL CHARACTERISTICS

✓ **Food Approved, FDA compliance**

acc.to 21 CFR parts 170-19

✓ **USDA Certified**

✓ **Food Approved, EU compliance**

(EC) No. 1935/2004 & (EU) No. 10/2011

✓ **Oil & Fat Resistant**

