


Raw 20 PU Grey ER
INFAB Bfab/2 EM 12-00+00 (U) BK 1.8mm
01030083

GENERAL CHARACTERISTICS

2 ply bare x bare TPU grey, extra rigid, antistatic and oil and fat resistant

BEST USED FOR

TECHNICAL INFORMATION

	IMPERIAL	METRIC
Max Production Width	118.11in	3000mm
Total Thickness	0.07in	1.8mm
Mass	0.37lb/ft²	1.8kg/m²
Tensile force at 1% elongation	68lbf/in	12N/mm
Working Temp.	-4/+194F°	-20/+90C°
Flexion (A)	2.36in 60mm	
Counter Flexion (B)	3.15in 80mm	
Coefficient of friction (bottom side) - Steel	0.20	

TENSION MEMBER

Interply	PU
Fabric	Polyester Extra-Rigid (ER)
Plies	2
Weft	Rigid (R)

TOP SIDE (CARRYING)

Material	Fabric
Color	Grey (GR)
Thickness	0in 0mm
Hardness	-
Surface	Bare (0)

BOTTOM SIDE (PULLEY)

Material	Fabric
Color	Grey (GR)
Thickness	0in 0mm
Hardness	-
Surface	Bare (0)

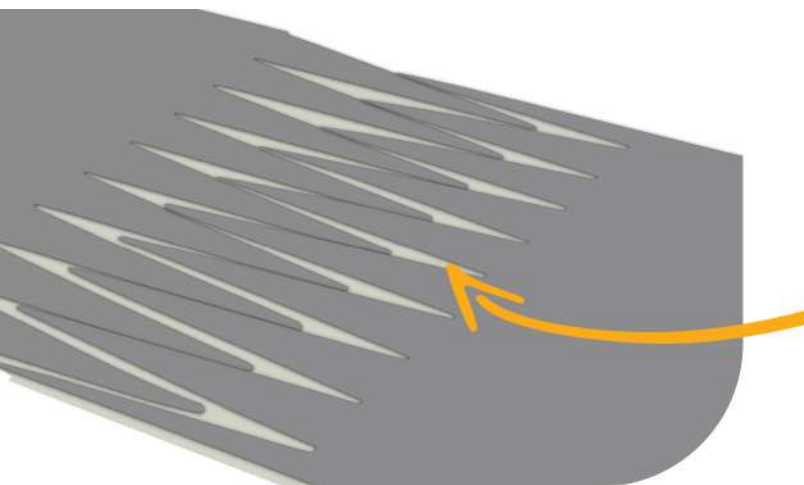
SPECIAL CHARACTERISTICS

- ✓ **Antistatic**
ISO 284 & 21178
- ✓ **Oil & Fat Resistant**



Raw 20 PU Grey ER
INFAB Bfab/2 EM 12-00+00 (U) BK 1.8mm
01030083

SPLICE INSTRUCTIONS (PREFERRED)



STRAIGHT FINGERS (SF)


Temperature:
Pressure:
**WATER
COOL**
**AIR
COOL**
**160 C°
320 F°**
**160 C°
320 F°**
**29 PSI
2 Bars**
**7.3 PSI
0.5 Bars**
Release Paper
Foil
Belt (Conveying Side Up)
Release Paper

Temperature:
Pressure:
**160 C°
320 F°**
**160 C°
320 F°**
**29 PSI
2 Bars**
**7.3 PSI
0.5 Bars**
Dwell Time:
0.00 Min
2.00 Min
Note: Foil is optional for air cooled.

MECHANICAL JOINING METHOD (at smallest pulley diameter)


Recessed Lacing
NO

Hidden Lacing
NO



Staple Lacing
RS62

Plastic Spiral Lacing
YES




Spiral Finger
YES


APF Fasteners
APF-100

Alligator
1

Clipper Lacing
UCM36 SLSP, 25 LP, 30, UCM36 SP, 36 SP, 1 XSP, 30P, UX-1 SP, UX-1 LLSP, 30L, 30LP

**Slider
Bed**

**Flat
Rollers**

**Slider Beds
on Both Sides**

**Channel
Trough**

**Conventional
Trough**

**Incline
Conveying**

**Incline
Variation**

**Bucket
Elevator**

**Conveyor with
Accumulation**

**Bend
Conveyor**

**Knife Edge
Conveyor**


● Applicable ● Limited Use ● Not Applicable

WARNING: This product can expose you to chemicals including carbon black, which is known to the State of California to cause cancer or birth defects or other reproductive harm. For more information visit www.P65WARNINGS.ca.gov

*Because of continuous development above data is subjected to change without prior notice by INO USA. This data replaces that included in previous publications. INO USA excludes any liability for the incorrect use of the above stated information.

RELEASED 01/04/2021