

Easy 20
INV BV/2 EM10 - 0+15 PVC PETROL AS 3.0
11009B

GENERAL CHARACTERISTICS

2 ply green PVC, antistatic

BEST USED FOR

TECHNICAL INFORMATION

	IMPERIAL	METRIC
Max Production Width	118.11in	3000mm
Total Thickness	0.12in	3mm
Mass	0.62lb/ft²	3kg/m²
Tensile force at 1% elongation	57lbf/in After Relaxation - ref. ISO 21181	10N/mm
Working Temp.	+14/+176F°	-10/+80C°
Flexion (A)	2.36in 60mm	
Counter Flexion (B)	3.94in 100mm	
Coefficient of friction (bottom side) - Steel 0.20		

TENSION MEMBER

Interply	PVC
Fabric	Polyester Rigid (EM)
Plies	2
Weft	Rigid (R)

TOP SIDE (CARRYING)

Material	PVC
Color	Petrol (PG)
Thickness	0.06in 1.5mm
Hardness	80 Shore A
Surface	Smooth Glossy (Glossy)

BOTTOM SIDE (PULLEY)

Material	Fabric
Color	Fabric (FA)
Thickness	0in 0mm
Hardness	-
Surface	Bare (0)

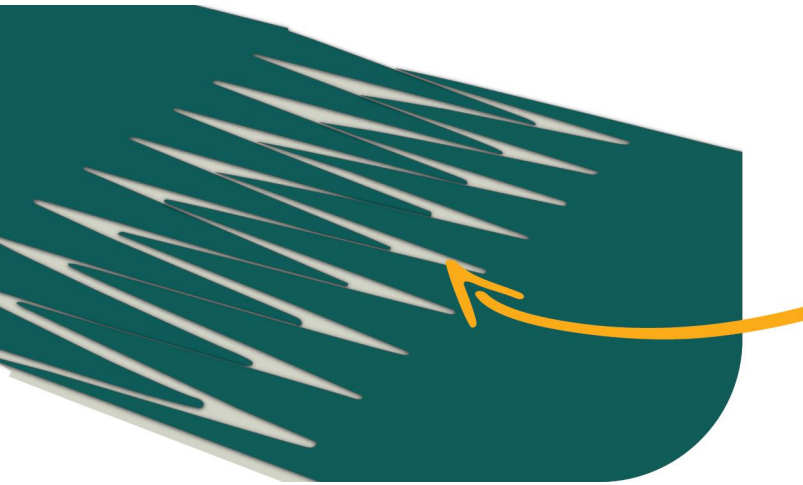
SPECIAL CHARACTERISTICS

- ✓ **Antistatic**
ISO 284 & 21178
- ✓ **Hydrolysis Resistant**

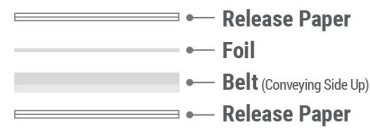


Easy 20
INV BV/2 EM10 - 0+15 PVC PETROL AS 3.0
11009B

SPLICE INSTRUCTIONS (PREFERRED)



STRAIGHT FINGERS (SF)


Temperature:
Pressure:
**WATER
COOL**
**175 C°
347 F°**
**29 PSI
2 Bars**
**AIR
COOL**
**175 C°
347 F°**
**7.3 PSI
0.5 Bars**

Temperature:
Pressure:
**175 C°
347 F°**
**29 PSI
2 Bars**
**175 C°
347 F°**
**7.3 PSI
0.5 Bars**
Dwell Time:
0.00 Min
2.00 Min
Note: Foil is optional for air cooled.

MECHANICAL JOINING METHOD (at smallest pulley diameter)


Recessed Lacing
NO

Hidden Lacing
NO




Staple Lacing RS62

Plastic Spiral Lacing
YES



Spiral Finger
NO


APF Fasteners -

Alligator
7

Clipper Lacing
25 LP, 30P, UX-1 SP, UCM36, 36, 1 SP, UX-1 LLSP, 30LP

**Slider
Bed**

**Flat
Rollers**

**Slider Beds
on Both Sides**

**Channel
Trough**

**Conventional
Trough**

**Incline
Conveying**

**Incline
Variation**

**Bucket
Elevator**

**Conveyor with
Accumulation**

**Bend
Conveyor**

**Knife Edge
Conveyor**


● Applicable ● Limited Use ● Not Applicable

WARNING: This product can expose you to chemicals including DINP, which is known to the State of California to cause cancer or birth defects or other reproductive harm. For more information visit www.P65WARNINGS.ca.gov

*Because of continuous development above data is subjected to change without prior notice by INO USA. This data replaces that included in previous publications. INO USA excludes any liability for the incorrect use of the above stated information.

RELEASED 01/04/2021