


Easy 10 Black Matt
INV BV/2 EM8 - 0+05 PVC black AS M2
11009

GENERAL CHARACTERISTICS

2 ply black PVC matt. Antistatic. Checkout belt

BEST USED FOR

TECHNICAL INFORMATION

	IMPERIAL	METRIC
Max Production Width	118.11in	3000mm
Total Thickness	0.08in	2mm
Mass	0.45lb/ft²	2.2kg/m²
Tensile force at 1% elongation	46lbf/in After Relaxation - ref. ISO 21181	8N/mm
Working Temp.	+14/+176F°	-10/+80C°
Flexion (A)	1.18in 30mm	
Counter Flexion (B)	1.97in 50mm	
Coefficient of friction (bottom side) - Steel	0.20	



TOP SIDE (CARRYING)

Material	PVC
Color	Black (B)
Thickness	0.02in 0.5mm
Hardness	80 Shore A
Surface	Smooth Matt (Matt)

BOTTOM SIDE (PULLEY)

Material	Fabric
Color	Fabric (FA)
Thickness	0in 0mm
Hardness	-
Surface	Bare (0)

SPECIAL CHARACTERISTICS

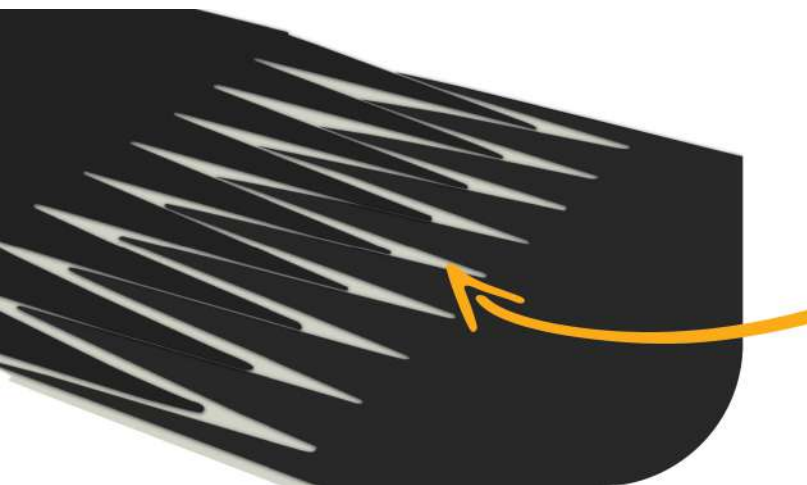
- ✓ **Antistatic**
ISO 284 & 21178
- ✓ **Abrasion Resistant**

- ✓ **Hydrolysis Resistant**



Easy 10 Black Matt
INV BV/2 EM8 - 0+05 PVC black AS M2
11009

SPLICE INSTRUCTIONS (PREFERRED)



STRAIGHT FINGERS (SF)


Temperature:
Pressure:
**WATER
COOL**
**AIR
COOL**
180 C°
356 F°
180 C°
356 F°
29 PSI
2 Bars
7.3 PSI
0.5 Bars
Release Paper
Foil
Belt (Conveying Side Up)
Release Paper

Temperature:
Pressure:
180 C°
356 F°
180 C°
356 F°
29 PSI
2 Bars
7.3 PSI
0.5 Bars
Dwell Time:
0.00 Min
2.00 Min
Note: Foil is optional for air cooled.

MECHANICAL JOINING METHOD (at smallest pulley diameter)


Recessed Lacing
NO

Hidden Lacing
NO




Staple Lacing -




Plastic Spiral Lacing
YES

Spiral Finger
YES

APF Fasteners -

Alligator
-

Clipper Lacing
25 SP, UCM36 SLSP, 25 LP, UCM36 SP, UX-1 SP, UX-1 LLSP

**Slider
Bed**

**Flat
Rollers**

**Slider Beds
on Both Sides**

**Channel
Trough**

**Conventional
Trough**

**Incline
Conveying**

**Incline
Variation**

**Bucket
Elevator**

**Conveyor with
Accumulation**

**Bend
Conveyor**

**Knife Edge
Conveyor**

 **Applicable**
 **Limited Use**
 **Not Applicable**

WARNING: This product can expose you to chemicals including carbon black, which is known to the State of California to cause cancer or birth defects or other reproductive harm. For more information visit www.P65WARNINGS.ca.gov

*Because of continuous development above data is subjected to change without prior notice by INO USA. This data replaces that included in previous publications. INO USA excludes any liability for the incorrect use of the above stated information.

RELEASED 01/04/2021